

ROLAX 26.01 Rail De-Stressing Machine



ROLAX 26.01 – 9802601200

To remove stresses from the rail and establish the nominal length of the rail by striking the rail head on both sides.

THE ADVANTAGES. YOUR BENEFITS.

Precise & powerful

- Height-adjustable hammers
- Continuously adjustable number of hammer strikes via gas activation

User-friendly


- LED lighting on both sides perfectly illuminates the work area
- Can be operated in both directions
- Carrying handles and lifting lugs

Safe

- Easily lockable guard in work area
- Engine can be started only if the guard is in place
- Emergency stop button and deadman's brake on both sides

Low-maintenance

- Centrifugal clutch

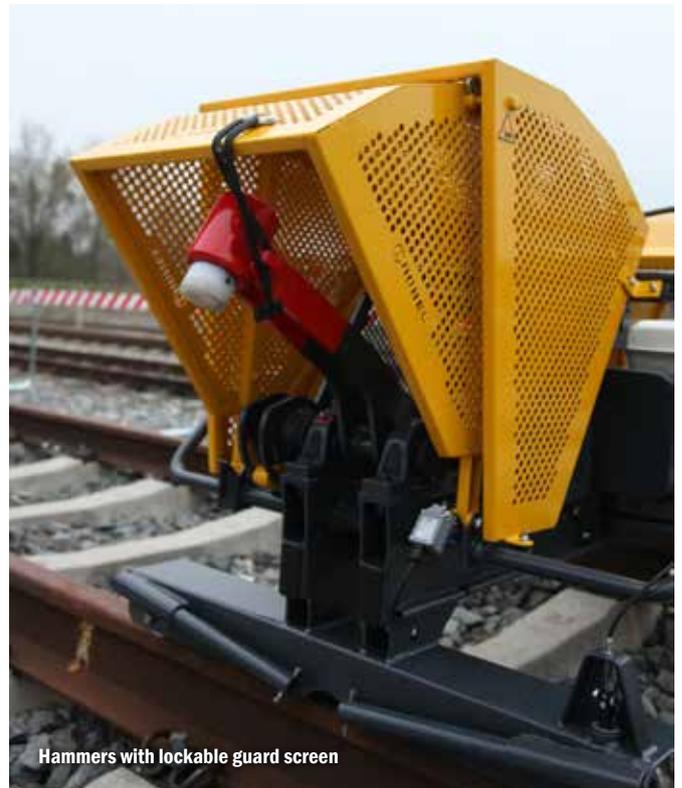

Hammers with lockable guard screen

SPECIFICATION

4-stroke engine	Honda GX200
Output	4.1 kW
Dimensions (L x W x H)	2660 x 1240 x 970 mm
Gauge	1435 mm
Weight	from 250 kg
Number of strikes	continuously adjustable, 45 – 60 strikes per rail