

THE ADVANTAGES. YOUR BENEFITS.

Safe transport on 4-wheel trolley

- Transports long-welded rails, track construction equipment, tools and track components

Options


- With or without parking brake acting on all 4 wheels
- With or without uprights
- Available for different track gauges

Version 5

- Combination of up to four devices using connecting rods



ROLLY 52.16 Version 3 with pivot plate, parking brake and uprights - 8005216011

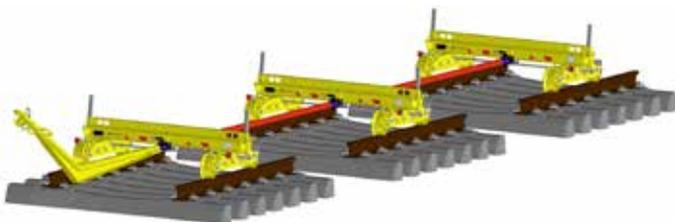

ROLLY 52.16 Version 5 with pivot plate, parking brake and uprights - 8269900040
 Drawbar - 4511850180
 Connecting rods - 8820032000



ROLLY 52.16 Version 5 - Trailer coupling detail

| SPECIFICATION | Version 2 | Version 3 | Version 5 | Version 6 |
|------------------------|---------------------|---------------------|-----------------------------|-----------------------------|
| Basic design | without pivot plate | with pivot plate | with or without pivot plate | with or without pivot plate |
| Max. carrying capacity | 15 t | 15 t | 15 t | 15 t |
| Wheel base | 480 mm | 480 mm | = Track gauge | = Track gauge |
| Cross beam length | 1900 mm | 1900 mm | 1900 mm | 1900 mm |
| Running wheel diameter | 250 mm | 250 mm | 250 mm | 250 mm |
| Max. permitted speed | 20 km/h | 20 km/h | 20 km/h | 20 km/h |
| Dimensions (L x W x H) | 780 x 1900 x 360 mm | 780 x 1900 x 493 mm | 1734 x 2056 x 390 mm | 1734 x 1900 x 390 mm |
| Weight | from 187 kg | from 252 kg | from 382 kg | from 304 kg |
| Trailer coupling | without | without | incl. 2 | without |

ACCESSORIES

Connecting rods for Version 5

- 8820032000 Connecting rod 5700 mm
- 8820032100 Connecting rod 4565 mm
- 5011850001 Connecting rod 1500 mm

Other lengths on request.

- 4511850180 Cropped drawbar, separable, Standard draw hook - Rockinger
- 8261800005 Push-fit uprights for Versions 2, 5 and 6 without pivot plate



ROLLY 52.16 Version 5 without pivot plate, with parking brake - 8269900038